

Parameter-uniform hybrid numerical scheme for singularly perturbed parabolic convection-diffusion problems with discontinuous initial conditions

Abstract

This article presents a parameter-uniform hybrid numerical technique for singularly perturbed parabolic convection-diffusion problems (SPPCDP) with discontinuous initial conditions (DIC). It utilizes the classical backward-Euler technique for time discretization and a hybrid finite difference scheme (which is a proper combination of the midpoint upwind scheme in the outer regions and the classical central difference scheme in the interior layer regions (generated by the DIC)) for spatial discretization. The scheme produces parameter-uniform numerical approximations on a piecewise-uniform Shishkin mesh. When the perturbation parameter ε ($0 < \varepsilon \ll 1$) is small, it becomes difficult to solve these problems using the classical numerical methods (standard central difference or a standard upwind scheme) on uniform meshes because discontinuous initial conditions frequently appear in the solutions of this class of problems. The method is shown to converge uniformly in the discrete supremum with nearly second-order spatial accuracy. The suggested method is subjected to a stability study, and parameter-uniform error estimates are generated. In order to support the theoretical findings, numerical results are presented.

Keywords: Singularly perturbed parabolic convection-diffusion problem, finite difference scheme, Discontinuous initial condition, Interior and Boundary Layer, Piecewise-uniform S-type mesh.
Subject Classifications: AMS 65M06; 65M12; 65M15

1. Introduction

This article investigates singularly perturbed parabolic partial differential equations (SPPDE) with interior layers, which are caused by the discontinuity in the initial condition (DIC) [24, 16, 1, 7, 12, 14, 15, 30]. SPPDE appears in many areas of science and engineering, including the simulation of oil extraction from underground reservoirs, fluid flows such as water quality problems in river networks, convective heat transport problems with large Péclet numbers, and so on [9, 8]. Singularly perturbed problems (SPPs) are convection-diffusion processes resulting from convection-diffusion linearization and are used in fields such as oil extraction, fluid flows, and convective heat transport problems. These problems are described by partial differential equations (PDEs) with the highest spatial derivative multiplied by an arbitrarily small parameter ε [9, 19, 26]. In general, the solutions of these problems possess boundary layers which are thin regions in the neighborhood of the boundary of the domain, where the gradient of the solution steepens as the perturbation parameter ε tends to zero. Unless the mesh size is reduced in comparison to the diffusion parameter, i.e., the singular perturbation parameter, classical numerical methods on uniform meshes may fail to

produce good numerical approximate solutions to these issues. The domain must be discretized using layer-adapted nonuniform meshes to get parameter-uniformly convergent numerical solutions to SPPs using classical finite difference techniques [31, 20, 18]. Because of these problems, numerical solutions to SPPs have grown in popularity among applied mathematicians and engineers. To get uniformly convergent numerical solutions of SPPs, numerous approaches are available in the literature; for more information, see the books by Miller et al. ([19]), Farrell et al. [9], Roos et al. [26], and Shishkin and Shishkina [28].

The main purpose of this article is to design and analyze a parameter-uniform hybrid scheme for solving SPPCDP with DIC. The parameter-uniform hybrid scheme for the SPPCDP with DIC is devised, produced, evaluated, and examined. We are interested in developing a parameter-uniform numerical technique [19] for this class of SPP in this study. SPPs cannot be solved effectively using ordinary numerical methods on uniform meshes due to the presence of boundary and interior layers in their solutions. Developing parameter-uniform numerical methods is thus a well-established principle in the study of numerical solutions to SPPs. We propose a higher-order uniformly convergent numerical scheme on the layer-adapted meshes like the piecewise-uniform Shishkin for singularly perturbed convection-diffusion problems with DIC and source term. Many ε -uniform numerical methods for stationary and non-stationary problems have been developed over the last few decades by many researchers; see the books [17, 6, 21, 1]. Roos et al. [26, 9] discussed numerical techniques for singularly perturbed differential equations. Natesan and Mukherjee [21, 20, 25], a parameter-uniform hybrid numerical scheme for the time-dependent convection-dominated initial boundary value problems. Clavero et al. [6, 4] and Cai and Liu [7, 3] have developed a variety of parameter uniform convergent methods based on Shishkin mesh. O’Riordan and Shishkin [28, 27, 23] considered parabolic problems with discontinuity as a function of time and developed a parameter-uniform numerical scheme using an implicit upwind difference scheme. Cen [2] developed an almost second-order parameter-uniform approximation using a hybrid difference scheme on the Shishkin mesh.

Mukherjee and Natesan [21, 20], discussed ε -Uniform error estimate of hybrid numerical scheme for SPPCDPs with interior layers. Mukherjee and Natesan [22, 21] considered a singularly perturbed parabolic convection-diffusion one-dimensional problem and the proposed numerical scheme consists of a classical backward-Euler method for the time discretization and a hybrid finite difference scheme for the spatial discretization, which proved second-order spatial accurate. According to Shishkin et al. [28, 29], parameter-uniform numerical methods for singularly perturbed parabolic problems with a DIC have been analyzed and examined. Rather than using hybrid (combination of midpoint upwind and central) finite difference operators on a piecewise-uniform mesh, Shishkin [6, 22] uses suitable fitted operator methods to capture the singularity in the neighborhood of the discontinuity.

Gracia and E. O’Riordan [12, 11], discussed parameter-uniform approximations for a SPPCDP with a DIC. Gracia and E. O’Riordan [32, 10, 11], they construct and design numerical approximations to a singularly perturbed problem with a DIC. Clavero et al. [3, 6, 5], proved an efficient numerical scheme for 1D parabolic SPP with interior and boundary layers. Mukherjee and Natesan, [21, 22], presented time-dependent convection-dominated initial-boundary-value issues with parameter-uniform hybrid numerical techniques. Roos and Linns [26] characterized such meshes for the first time with the help of the mesh-generating functions and utilizing it, they easily deduced ε -uniform converges of the simple upwinding and linear finite elements applied to singularly perturbed boundary value problem exhibiting regular boundary layer. Recently, for SPPCDP, Mukherjee and Natesan [21], improved a hybrid numerical approach for SPP with parameter-uniform interior layers. In recent years, regarding SPP with discontinuous convection coefficients possessing strong interior layers, Hemker et al. [15, 16] analyzed ε -uniform convergence of the standard upwind

scheme for a stationary case. This paper addresses the SPPCDP with a DIC and focuses on the position of the interior layer function (2.1). When the parameter is extremely small, an interior layer follows a characteristic curve associated with the reduced problem. In a related work by [6], we examined a similar SPCDP with a DIC set by $a = 0$. The paper identifies an analytical function that aligns with the DIC while satisfying a differential equation with constant coefficients. The position of the interior layer function changes over time in the corresponding convection-diffusion problem, and numerical methods must track this position. Techniques like the Shishkin mesh tackle the problem for initial conditions $\phi \in C^0(0, 1) \setminus C^1(0, 1)$. The paper assumes that the convective coefficient is smooth, strictly positive, and solely time-dependent. An explicit discontinuous function, denoted as $\tilde{S}(x, t)$, captures the singularity associated with the DIC. Asymptotic expansions for the solution $u(x, t)$, including this singularity, are constructed. When subtracting this singular function, the remaining $\tilde{y} = u(x, t) - \tilde{S}(x, t)$ becomes the solution of an SPCDP.

With this motivation, the objective is to develop and analyze a parameter-uniform hybrid numerical approach for solving the SPPCDP with DIC (2.1). The paper proposes a numerical scheme that combines the backward-Euler method for time discretization and a hybrid finite difference scheme for spatial discretization. This hybrid scheme integrates the classical backward-Euler method for time discretization with a hybrid finite difference scheme for spatial discretization. We also analyze the truncation error associated with our proposed approach, perform stability analysis, and present numerical examples to validate the theoretical findings.

The remainder of the paper is organized as follows: Section 2, we define the continuous problem to be examined, define the singular function $\tilde{S}(x, t)$ associated with DIC, and present prior bounds on the derivatives of the remainder term $\tilde{y}(x, t)$. Section 3, introduces a numerical scheme in the transformed domain based on a hybrid scheme. Section 4, discussed uniformly convergent of fully discrete scheme. Section 5, discusses error analysis and their stability. Section 6, includes numerical examples to validate the theoretical results. The paper concludes with the conclusions.

Notations Domains are represented by $\Omega = (0, 1)$, $\tilde{d} = \tilde{d}(0)$, $D = \Omega \times (0, T)$. In this paper, we use C as a constant independent of both the singular perturbation parameter ε and all discretization parameters.

A function's jump (a jump of a function) ϕ at a discontinuity point $\tilde{d}$ is also defined by

$$[\phi](\tilde{d}) = \phi(\tilde{d}^+) - \phi(\tilde{d}^-).$$

The $\mathcal{L}_\infty$ norm on the domain D will be denoted by $\|\cdot\|_{\bar{D}}$. We also denote the following interior layer function

$$E_\gamma(x, t) = \exp\left(-\frac{\gamma(x - \tilde{d}(t))^2}{4\varepsilon t}\right), \quad 0 < \gamma \leq 1.$$

The finite difference operators $\mathcal{L}, \mathcal{L}, \mathcal{L}_\varepsilon$, and $\mathcal{L}^{N,M}$ denotes to approximate the differential operator $\mathcal{L}$ and will be discussed further.

We denote $\|\cdot\|_{\bar{D}}$ is the maximum norm over any region D , which is defined by

$$\|g\|_{\bar{D}} = \max_{x \in \bar{D}} |g(x)|_{\bar{D}}$$

for any function g .

The space $C^{0+\gamma}(D)$ where $D \subset \mathbb{R}^2$, denotes an open set and is defined by

$$C^{n+\gamma}(D) = \left\{ z : \frac{\partial^{i+j} z}{\partial x^i \partial y^j} \in C^{0+\gamma}(D), \quad 0 \leq i + 2j \leq n \right\}, \quad \text{for each integer } n \geq 0,$$

$C^{0+\gamma}(D)$ represents Hölder continuous functions of degree $0 < \gamma < 1$.

2. The Continuous Problem

We consider the following 1D SPPCDP with DIC on domain D :

$$\left\{ \begin{array}{l} \mathcal{L}u(x, t) = u_t(x, t) - \varepsilon u_{xx}(x, t) + a(x, t)u_x(x, t) + b(x, t)u(x, t) = f(x, t), \quad (x, t) \in D, \\ u(x, 0) = \phi(x), 0 \leq x \leq 1; \quad [\phi](\tilde{d}) \neq 0, 0 < \tilde{d} \leq \mathcal{O}(1) < 1; \\ u(0, t) = u(1, t) = 0, \quad 0 < t \leq T; \\ a(x, t) > \alpha > 0, \quad \forall (x, t) \in D, \quad 0 \leq t \leq T, \quad a, f \in C^{4+\gamma}(\bar{D}), \quad \gamma > 0, \\ \phi^{(i)} \in C^4((0, 1)) \setminus \{\tilde{d}\} : \phi^{(i)}(0) = \phi^{(i)}(1) = 0; \quad 0 \leq i \leq 4. \\ f^{(i+2j)}(p, 0) = 0; \quad 0 \leq i + 2j \leq 4 - 2p, \quad p = 0, 1; \\ a_x(\tilde{d}, 0) = 0, \quad [\phi'](\tilde{d}) = 0. \end{array} \right. \quad (2.1)$$

where $D = \Omega \times (0, T]$, $\Omega = (0, 1)$, $t \in (0, T]$, $T > 0$. Here ε is a perturbation parameter such that $0 < \varepsilon \ll 1$ and the coefficients $a(x, t)$, $b(x, t)$ are smooth functions satisfying the followings:

$$a(x, t) \geq \alpha > 0, b(x, t) \geq \beta \geq 0 \quad \text{on} \quad \bar{\Omega}.$$

Moreover, $[\phi]$ denotes the jump in the function ϕ across the point of discontinuity $x = \tilde{d}$, that is, $[\phi](\tilde{d}) = \phi(\tilde{d}^+) - \phi(\tilde{d}^-)$. In general, due to the presence of a discontinuity in the convection coefficient $a(x, t)$, the solution $u(x, t)$ of the problem (2.1) possesses an interior layer in the neighborhood of the point $x = \tilde{d}$. We observe that the initial function $\phi(x)$ is discontinuous at $x = \tilde{d}$ and the location of this point does not depend on the singular perturbation parameter ε .

We assume that the initial data ϕ are sufficiently smooth functions on the domain $\bar{D}$ [?] and that satisfy sufficient compatibility conditions at the corner points $(0, 0)$ and $(1, 0)$.

We also assume that the required compatibility conditions at the transition point $(\tilde{d}, 0)$ follow a similar pattern. Assuming sufficient smoothness and compatibility conditions on u_0 and f , the parabolic problem (2.1) typically has a unique solution $u(x, t)$. This solution displays a regular boundary layer of width $\mathcal{O}(\varepsilon)$ at $x = 1$. Additionally, in the range $a(t) > \alpha > 0, 0 \leq t \leq T, a, f \in C^{4+\gamma}(\bar{D})$, we presume that b and f constitute suitably regular layer components. Moreover, we assume adequate compatibility at the points $(0, 0)$ and $(1, 0)$ to ensure $u \in C^{4+\gamma}(\bar{D})$.

Let there be a point $\tilde{d} \in (0, 1)$ such that ϕ is not continuous at $x = \tilde{d}$, but $\phi \in C^4(\bar{\Omega} \setminus \{\tilde{d}\})$.

Since $a > 0$, the function $\tilde{d}(t)$ is monotonically increasing. Therefore we assume that the convection term $a(x, t)$ depends on both time and space variables. Then the location of the interior layer does not remain at the same position throughout the process. Thus, we need to track the movement of the layer. The path of the characteristic curve Γ is defined by the following:

$$\Gamma = \left\{ \left(\tilde{d}(t), t \right) : \tilde{d}'(t) = a(\tilde{d}(t), t), \quad \tilde{d}(0) = \tilde{d}, \quad 0 < t < 1 \right\} \quad (2.2)$$

We note that the characteristic curve Γ is generally not a straight line. Since $a(x, t) > 0$, the curve Γ is strictly increasing. Therefore, we have to restrict the final time T in order to avoid the overlap (to extend over or past around and cover) between the interior layer and the boundary layer regions. We also restrict the size of the final time T so that the interior layer does not interact with the boundary layer. We note that Gracia and E. O'Riordan [12, 14] proved that the restriction can be defined by the following relation:

$$0 < \frac{1 - \tilde{d}(T)}{1 - \tilde{d}} = \delta < 1, \quad \text{where} \quad \tilde{d}(T) \leq 1 - \delta. \quad (2.3)$$

Next, we decompose the solution u of problem (2.1) into the following way:

$$u(x, t) = \frac{[\phi](\tilde{d})}{2} \tilde{S}(x - d, t) + \tilde{y}(x, t), \text{ where } [\phi](d) = \phi(d^+) - \phi(d^-) \quad (2.4)$$

The discontinuity in the initial condition generates an interior layer emanating from the point $(\tilde{d}, 0)$. By identifying the leading term $\frac{1}{2}[\phi](\tilde{d})\psi_0$ in an asymptotic expansion of the solution, we can define the following continuous function

$$\tilde{y}(x, t) = u(x, t) - \tilde{S}(x, t) \quad (2.5)$$

where $\tilde{S}(x, t) = \frac{1}{2}[\phi](\tilde{d})\psi_0(x, t)$, $\psi_0(x, t) = \text{erfc}\left(\frac{\tilde{d}(t) - x}{2\sqrt{\varepsilon t}}\right)$, $\text{erfc}(z) = \frac{2}{\sqrt{\pi}} \int_{r=z}^{\infty} e^{-r^2} dr$ with

$$\mathcal{L}\tilde{y} = f + \frac{1}{2}[\psi](\tilde{d}) \left(a(\tilde{d}(t)) - a(x) \right) \frac{\partial}{\partial s} \psi_0(x, t), \quad (2.6)$$

The component of function $\tilde{y}$ satisfies the following problem:

$$\begin{cases} \mathcal{L}\tilde{y} = 0, & (x, t) \in D, \\ \tilde{y}(0, t) = -\frac{1}{2}[\phi](\tilde{d})\psi_0(0, t), & [0, T], \\ \tilde{y}(1, t) = -\frac{1}{2}[\phi](\tilde{d})\psi_0(1, t). & [0, T], \end{cases} \quad \tilde{y}(x, 0) = \begin{cases} \phi(x), & x \leq \tilde{d}, \\ \phi(\tilde{d}^{-1}), & x = \tilde{d}, \\ \phi(x) - [\phi](d), & x > \tilde{d} \end{cases} \quad (2.7)$$

Using the definition of the discontinuous function $\tilde{S}$, we observe the following:

$$\tilde{S}(x - \tilde{d}, 0) = \begin{cases} -1, & x < \tilde{d}, \\ 0, & x = \tilde{d}, \\ 1, & x > \tilde{d}. \end{cases} \quad (2.8)$$

2.1. Transformation to fix the location of the interior layer

We observe that the in-homogeneous term in (2.6) is continuous, but not in $C^1(\bar{D})$ on the closed domain. The presence of an inhomogeneous term will induce an interior layer into the function y . So if the convective term $a(x, t)$ depends on the space variable, we are required to transform the problem (2.1) so that the curve Γ is transformed to a straight line, around which a layer-adapted mesh-like piecewise-uniform Shishkin mesh is constructed.

One possible choice for the transformation $X : (x, t) \rightarrow (k, t)$ is the piecewise linear map given by [10, 12]

$$k(x, t) = \begin{cases} \frac{\tilde{d}}{\tilde{d}(t)} x, & x \leq \tilde{d}(t), \\ 1 - \frac{1 - \tilde{d}}{1 - \tilde{d}(t)} (1 - x), & x \geq \tilde{d}(t), \end{cases} \quad (2.9)$$

which means that $a(\tilde{d}(t), t) = a(\tilde{d}, t)$. We note that $x = k$ at $t = 0$ and $x = d$ for all t such that $x = \tilde{d}(t)$. We also define two subdomains of D on either side of (left and right subdomains) Γ to be

$$D^- = \bar{\Omega}^- \times (0, T] = (0, \tilde{d}) \times (0, T] \quad \text{and} \quad D^+ = \bar{\Omega}^+ \times (0, T] = (\tilde{d}, 1) \times (0, T].$$

Using this map, the differential equation (2.1) can be transformed into the following problem: Find y such that

$$\begin{cases} \mathcal{L}\tilde{y} = g \left(f + \frac{1}{2}[\phi](\tilde{d}) \frac{(a(\tilde{d}, t) - a(k, t))}{\sqrt{\varepsilon\pi t}} \exp^{-\frac{g(k, t)(k - \tilde{d})^2}{4\varepsilon t}} \right) + \\ \frac{1}{2}[\phi](d) (b(\tilde{d}, t) - b(x, t)) g(x, t) \psi(x, t), \quad x \neq \tilde{d}, \\ [\tilde{y}](\tilde{d}, t) = 0, \quad \left[\frac{1}{\sqrt{g}} \tilde{y}_x \right](\tilde{d}, t) = 0, \end{cases} \quad (2.10)$$

with the following transformed initial conditions,

$$\tilde{y}(p, t) = -\frac{1}{2}[\phi](\tilde{d})\psi_0(p, t), \quad p \in \{0, 1\}, \quad 0 \leq t \leq T, \quad (2.11)$$

$$\tilde{y}(x, 0) = \begin{cases} \phi(x), & x < \tilde{d}, \\ \phi(\tilde{d}^-), & x = \tilde{d}, \\ \phi(x) - [\phi](\tilde{d}), & x > \tilde{d}. \end{cases} \quad (2.12)$$

Here, $\mathcal{L}\tilde{y} = -\varepsilon\tilde{y}_{xx} + k(x, t)\tilde{y}_x + g(x, t)(b(x, t)\tilde{y} + \tilde{y}_t)$ and the functions g, k are defined by,

$$k(x, t) = \begin{cases} \sqrt{g} \left(a(x, t) + a(\tilde{d}, t)(\psi_d(x) - 1) \right), \end{cases} \quad (2.13)$$

$$g(x, t) = \begin{cases} \left(\frac{d(t)}{\tilde{d}} \right)^2, & x < \tilde{d}, \\ \left(\frac{1 - \tilde{d}(t)}{1 - \tilde{d}} \right)^2, & x > \tilde{d}. \end{cases} \quad (2.14)$$

and

$$\psi_{\tilde{d}}(x) = \begin{cases} \frac{\tilde{d}-x}{\tilde{d}}, & x < \tilde{d}, \\ \frac{x-\tilde{d}}{1-\tilde{d}}, & x > \tilde{d}. \end{cases} \quad (2.15)$$

2.2. Bounds for the solution of continuous problem

In this section, we analyze the solution of the SPPCDPs defined by (2.1) and its derivatives. The solution's existence and uniqueness depend on the smoothness of $\phi(x)$ and the compatibility condition at the corner points, as described below:

$$\phi_0(0) = \phi_1(1) = 0, \quad (2.16)$$

and

$$\begin{cases} \frac{\partial \phi_1(0)}{\partial t} = -\varepsilon \frac{\partial^2 \phi(0)}{\partial x^2} + a(0) \frac{\partial \phi(0)}{\partial x} + b(0)\phi(0) = f(0, 0), \\ \frac{\partial \phi_2(1)}{\partial t} = -\varepsilon \frac{\partial^2 \phi(1)}{\partial x^2} + a(1) \frac{\partial \phi(1)}{\partial x} + b(1)\phi(1) = f(1, 0). \end{cases} \quad (2.17)$$

2.2.1. Decomposition of the solution

The sections that follow discuss solution decomposition. To develop sharp bounds in the error analysis, the SPPCDP with DIC (2.1) solution $u(x)$ is decomposed into $u(x, t) = v(x, t) + w(x, t) + z(x, t)$, $(x, t) \in \bar{D}$, where regular (smooth) component $p(x, t)$, singular component $q(x, t)$, and interior layer component $z(x, t)$. The smooth component $p(x, t)$ can be expressed using an asymptotic expansion:

$$v(x, t) = \sum_{i=0}^4 \varepsilon^i v_i(x, t) = p_0(x, t) + \varepsilon v_1(x, t) + \varepsilon^2 v_2(x, t) + \varepsilon^3 v_3(x, t) + \varepsilon^4 v_4(x, t), \quad (x, t) \in \bar{D}$$

where the functions $v(x, t)$ satisfies the following equations

$$\left\{ \begin{array}{l} \partial \frac{\partial v_0}{\partial t} + a \frac{\partial v_0}{\partial x} + b v_0 = f, \quad \text{in } D^- \cup D^+ \\ v_0(0, t) = u(0, t), \quad t \in (0, T], \quad v_0(x, 0) = u(x, 0), \quad x \in \bar{\Omega}, \\ \partial \frac{\partial v_1}{\partial t} + a \frac{\partial v_1}{\partial x} + b v_1 = -\frac{\partial^2 v_0}{\partial x^2}, \\ v_1(0, t) = 0, \quad v_1(1, t) = 0, \quad t \in (0, T], \quad v_1(x, 0) = 0, \quad x \in \bar{\Omega} \\ \partial \frac{\partial v_2}{\partial t} + a \frac{\partial v_2}{\partial x} + b v_2 = -\frac{\partial^2 v_1}{\partial x^2}, \\ v_2(0, t) = 0, \quad t \in (0, T], \quad v_2(x, 0) = 0, \quad x \in \bar{\Omega}, \end{array} \right. \quad (2.18)$$

and lastly, the functions v_3 satisfies

$$\left\{ \begin{array}{l} \mathcal{L} v_3 = -\frac{\partial^2 v_2}{\partial x^2}, \quad \text{in } D \\ v_3(0, t) = v_3(1, t) = 0, \quad t \in (0, T], \quad v_3(x, 0) = 0, \quad x \in \bar{\Omega}. \end{array} \right. \quad (2.19)$$

Hence, the smooth component of the solution satisfies the discontinuous function $v(x, t)$ by

$$\left\{ \begin{array}{l} \mathcal{L} v = f, \quad (x, t) \in D^- \cup D^+, \\ v(x, 0) = u(x, 0), \quad x \in \bar{\Omega}, \\ v(0, t) = u(0, t), \quad v(\tilde{d}^-, t) = g_1(t), \\ v(\tilde{d}^+, t) = g_2(t), \quad v(1, t) = u(1, t), \quad t \in (0, T], \end{array} \right. \quad (2.20)$$

where $v(\tilde{d}^\pm, t) = \lim_{x \rightarrow \tilde{d}^\pm 0} v(x, t)$ and the suitable choices of the functions $g_1(t)$ and $g_2(t)$ will be obtained from Theorem 2.2.

We define the discontinuous function w , which represents the singular component of the decomposition, as follows:

$$\left\{ \begin{array}{l} \mathcal{L} w = 0, \quad (x, t) \in D^- \cup D^+, \\ w(0, t) = w(1, t) = 0, \quad w(x, 0) = 0, \\ [w](\tilde{d}, t) = -[v](\tilde{d}, t), \quad [(w)_x](\tilde{d}, t) = -[(v)_x](\tilde{d}, t), \\ \text{Hence } w(\tilde{d}^-, t) = u(\tilde{d}^-, t) - v(\tilde{d}^-, t) \quad \text{and} \\ w(\tilde{d}^+, t) = u(\tilde{d}^+, t) - v(\tilde{d}^+, t). \end{array} \right. \quad (2.21)$$

We define the discontinuous function z , which constitutes the interior component of the decomposition, as follows:

$$\begin{cases} \mathcal{L}z = 0, & (x, t) \in D^- \cup D^+, \\ [z](\tilde{d}, t) = -[v](\tilde{d}, t), \quad [z_x](\tilde{d}, t) = -[v_x + w_x](\tilde{d}, t), t \geq 0, \\ z(0, t) = z(1, t) = 0, \quad t \geq 0, \quad z(x, 0) = 0, \quad x \in \Omega^-, \\ z(x, 0) = \phi(x, 0) - w(x, 0), \quad x \in \Omega^+. \end{cases} \quad (2.22)$$

Theorem 2.1. Assume in equations (2.1) that the data $a, b \in C^2(\bar{\Omega})$, $f \in C^{2+\lambda}(\bar{D})$ and the convection coefficient $a(x, t) \geq \alpha > 0$, $x \in \bar{\Omega}$. Also, let the initial data ϕ be identically zero so that the compatibility conditions

$$\frac{\partial^{i+k} f}{\partial x^i \partial t^k}(0, 0) = \frac{\partial^{i+k} f}{\partial x^i \partial t^k}(1, 0) = 0, \quad \text{for } 0 \leq i + 2k \leq 2,$$

be fulfilled. Then the solution $u(x, t)$ of the (2.1) lies in $f \in C^{4+\lambda}(\bar{D})$ and satisfies the estimates

$$\left\| \frac{\partial^{i+k} u}{\partial x^i \partial t^k}(x, t) \right\|_{D^- \cup D^+} \leq C\varepsilon^{-1}, \quad 0 \leq i + 2k \leq 4. \quad (2.23)$$

Theorem 2.2. For all non-negative integers $i, k, k \in N \cup \{0\}$ satisfying $0 \leq i \leq 3$ and $0 \leq i + 2k \leq 4$, there exist smooth functions $g_1(t), g_2(t)$ such that the smooth component p given in (2.20) satisfying the bounds

$$\begin{aligned} \left\| \frac{\partial^{i+k} v}{\partial x^i \partial t^k}(x, t) \right\|_{D^- \cup D^+} &\leq C, \quad 0 \leq i + 2k \leq 4 \\ \left\| \frac{\partial^4 v}{\partial x^4}(x, t) \right\| &\leq C\varepsilon^{-1}, \quad (x, t) \in D^- \cup D^+, \end{aligned}$$

and the boundary layer component q given in (2.21) satisfies the bounds

$$\begin{aligned} \left| \frac{\partial^{i+k} w}{\partial x^i \partial t^k}(x, t) \right| &\leq \begin{cases} C \left(\varepsilon^{-i} e^{-(\tilde{d}-x)\alpha_1/\varepsilon} \right), & (x, t) \in D^-, \\ C \left(\varepsilon^{-i} e^{-(\tilde{d}-x)\alpha_2/\varepsilon} \right), & (x, t) \in D^+, \end{cases} \\ \left| \frac{\partial^4 w}{\partial x^4}(x, t) \right| &\leq \begin{cases} C \left(\varepsilon^{-4} e^{-(\tilde{d}-x)\alpha_1/\varepsilon} \right), & (x, t) \in D^-, \\ C \left(\varepsilon^{-4} e^{-(\tilde{d}-x)\alpha_2/\varepsilon} \right), & (x, t) \in D^+. \end{cases} \end{aligned}$$

where C is a constant independent of ε .

Theorem 2.3. There exists a function $r(t)$ such that the problem solutions v, w

$$\mathcal{L}_\varepsilon v = f, \quad (x, t) \in D, \quad (2.24a)$$

$$v(x, 0) = g_1(x), \quad v(-1, t) = u(-1, t), v(1, t) = r(t) \quad (2.24b)$$

$$\mathcal{L}_\varepsilon w = 0, \quad (x, t) \in D, \quad (2.24c)$$

$$w(0, t) = 0, w(-1, t) = 0, w(1, t) = u(1, t) - r(t), \quad (2.24d)$$

such that $v, w \in C^{4+\gamma}(\bar{D})$ and the following regular component v satisfies the following bounds for $0 \leq i + 2j \leq 4$,

$$\left\| \frac{\partial^{i+j}}{\partial x^i \partial t^j} v^-(x, t) \right\|_{\bar{D}^-} \leq \left(1 + \varepsilon^{2-(i+j)} \right), \quad (2.25a)$$

$$\left\| \frac{\partial^{i+j}}{\partial x^i \partial t^j} v^+(x, t) \right\|_{\bar{D}^+} \leq C \left(1 + \varepsilon^{1-i/2} \right). \quad (2.25b)$$

Next, we decompose the boundary layer components w , for all $0 \leq i + 2j \leq 4$ and $(x, \bar{D})$, of the solution u of the discontinuous initial condition (2.1) to satisfy the following bounds:

$$\left| \frac{\partial^{i+j}}{\partial x^i \partial t^j} w_L(x, t) \right| \leq C \varepsilon^{-i/2} e^{-\frac{x}{\sqrt{\varepsilon}}}, \quad (2.26a)$$

$$\left| \frac{\partial^{i+j}}{\partial x^i \partial t^j} w_R(x, t) \right| \leq C \varepsilon^{-i/2} e^{-\frac{1-x}{\sqrt{\varepsilon}}}. \quad (2.26b)$$

Theorem 2.4. *The interior layer component $z \in C^{2+\gamma}(\bar{D}^+) \cup C^{2+\gamma}(\bar{D}^-)$ satisfies the bounds*

$$|z(x, t)| \leq C e^{\frac{-\gamma g(x, t)(d-t)^2}{4\varepsilon t}}, \quad (x, t) \in D. \quad (2.27)$$

For $x \neq \tilde{d}$,

$$\left\| \frac{\partial^{i+m} z}{\partial x^i \partial t^k}(x, t) \right\| \leq C \left(1 + \varepsilon^{-i/2} \right), \quad i + 2m \leq 3; \quad \text{and} \quad \left| \frac{\partial^2 z}{\partial t^2}(x, t) \right| \leq C \left(1 + \sqrt{\varepsilon/t} \right).$$

Proof. The detailed proof can be obtained by [10, 12].

Remark 2.5. *If u is the solution of the continuous problem (2.10) in the transformed domain and U be the solution of the discrete problem (3.1), then $\hat{U}$ is the solution obtained from U using the hybrid scheme. If $[\phi](\tilde{d}) = 0$ then the function u is decomposed as $u = v + w + z$. In this case, the constraint $M = \mathcal{O}(N)$ can be removed by using the proof of the next theorem, and the following error estimate can be obtained:*

$$\|\hat{U} - u\|_{\bar{D}} \leq CN^{-1} \ln N + CM^{-1} \ln M$$

If $[\phi'](\tilde{d}) \neq 0$ then the error bound is dominated by the term $CM^{-\frac{1}{2}}$, which corresponds to the result in [9], that is,

$$\|\hat{U} - u\|_{\bar{D}} \leq CN^{-1} \ln N + C|[\phi'](d)|M^{-\frac{1}{2}}.$$

3. Numerical Scheme in the transformed domain

In this section, we use the implicit Euler method for time discretization and a layer-adapted mesh of the Shishkin type for spatial discretization with a hybrid numerical scheme. The main focus is to investigate both the semi-discretization and spatial discretization of the model problem, which are crucial for analyzing the convergence of the fully discrete scheme.

We approximate the problem (2.7) using the implicit-Euler approach and typical central differences on layer-adapted meshes, such as the S-type mesh described in [18, 21, 31]. It's important to note that the interior layer, originating from $x = \tilde{d}$ and following the characteristic curve Γ , remains independent of the boundary layer near $x = 1$.

3.1. The Semidiscretization

This section discusses the temporal semi-discretization of the model problem (2.1) which is required for the fully discrete scheme's convergence analysis.

We consider a uniform mesh to discretize the time domain $[0, T]$ and denote it with a uniform time step size Δt such that

$$\hat{\Omega}_t^M = \{t_n : t_n = n\Delta t, n = 0, \dots, M, \quad t_0 = 0, \quad t_M = T, \quad \Delta t = T/M\}$$

where M denotes the number of mesh intervals in the t -direction (temporal direction).

By using the backward-Euler method to discretize the problem (2.1), we obtain the following semidiscrete scheme:

$$\left\{ \begin{array}{l} U^0 = \phi(x), \quad 0 \leq x \leq 1, \quad [\phi](\tilde{d}) \neq 0, \quad 0 < \tilde{d} < 1, \\ \left\{ \begin{array}{l} (I + \Delta t \mathcal{L}_{x,\varepsilon}) \hat{U}^{n+1} = U^{n+1}(x) + \Delta t f(x, t_{n+1}), \\ \left[\frac{D_x^0 U}{\sqrt{g}} \right] (\tilde{d}, t_j) = 0, x_i = \tilde{d}, \quad t_j > 0, \\ \hat{U}^{n+1}(0, t) = \hat{U}^{n+1}(1, t) = 0, \quad t_j \geq 0 \\ \hat{U}^{N, \Delta t} = \hat{u}(x_i, t_j), \quad (x_i, t_j) \in \Gamma_\tau^{N, M}. \end{array} \right. \\ n = 0, 1, \dots, M-1, \end{array} \right. \quad (3.1)$$

where

$$\begin{aligned} \mathcal{L}_{x,\varepsilon} &= u_t(x, t) - \varepsilon u_{xx}(x, t) + a(x, t)u_x(x, t) + b(x, t)u(x, t) \\ \left[\frac{D_x^0 U}{\sqrt{g}} \right] (d, t_j) &= \frac{1-d}{(1-d(t_j))} D_x^+ U(d, t_j) - \frac{d}{d(t_j)} D_x^- U(d, t_j). \end{aligned}$$

D_x^0 is the central difference and I is the identity operator. In addition, $U^n(x)$ is the semi-discrete approximation to the exact solution $u(x, t)$ of the continuous problem (2.1) at t_n .

The operator $(I + \Delta t \mathcal{L}_{x,\varepsilon})$ satisfies the following minimum principle, which ensures the stability of the scheme (3.1).

3.1.1. Convergence Analysis

Lemma 3.1. (*Minimum Principle for the semi-discrete problem*) Let D be any domain and $z \in C^2(\bar{D})$. If $z(x) \geq 0$ on the boundary of D and $(I + \Delta t \mathcal{L}_{x,\varepsilon}) z(x) \leq 0, \forall x \in D$, then $z(x) \geq 0, \forall x \in \bar{D}$.

Proof. The proof can be found in [20] and [21] for detailed information.

In order to analyze the uniform convergence of the solution $\hat{U}^n(x)$ of (3.1) to the exact solution $u(x, t_n)$, we will do the stability analysis and also derive the consistency result of the scheme (3.1). It is clear that the operator $(I + \Delta t \mathcal{L}_{x,\varepsilon})$ satisfies the following maximum principle:

$$\| (I + \Delta t \mathcal{L}_{x,\varepsilon})^{-1} \|_\infty \leq \frac{1}{1 + \beta \Delta t},$$

which ensures the stability of the scheme (3.1) and (see [?] for details).

Next, we define the local truncation error e_{n+1} for the semi-discrete scheme (3.1), and at the $(n+1)$ -th time level, this error is characterized by the following expression:

$$e_{n+1} = u(t_{n+1}) - \hat{u}^{n+1}, \dots, n = 0, 1, \dots, M-1. \quad (3.2)$$

where $\hat{u}^{n+1}$ is the solution obtained after one step of the semi-discrete scheme, initialized with the exact value $u(t_n)$ instead of using $u^n(x)$ as the initial data. Specifically, we have:

$$\begin{cases} (I + \Delta t \mathcal{L}_{x,\varepsilon}) \hat{u}^{n+1}(x) = -u(x, t_n) + \Delta t f(x, t_{n+1}), & x \in \Omega, \\ \hat{u}^{n+1}(0) = \hat{u}^{n+1}(1) = 0. \end{cases} \quad (3.3)$$

Lemma 3.2. *Let the local truncation error e_{n+1} satisfies*

$$\|e_{n+1}\|_{\infty} \leq (C\Delta t^2).$$

Proof. One can refer [22].

The following lemma gives consistency results for the semidiscrete scheme:

Lemma 3.3. *Let u be the solution of the problem (2.1). If*

$$|\frac{\partial^l}{\partial t^l} u(x, t)| \leq C, \quad (x, t) \in \bar{\Omega} \times (0, T), \quad 0 \leq l \leq 2$$

then, the local error corresponding to the numerical scheme (2.1) satisfies

$$\|e_{n+1}\|_{\infty, \bar{\Omega}} \leq C((\Delta t)^2), \quad n = 0, 1, \dots, M-1. \quad (3.4)$$

In order to show the uniform convergence of semidiscretization in (3.1), we introduce the global error E_n as

$$E_n = u(t_n) - u^n, \quad 1 \leq n \leq M. \quad (3.5)$$

The following theorem demonstrates that the global error for time semidiscretization processes are first-order convergent.

Theorem 3.4. *The global error E_n in (3.5) satisfies*

$$\sup_{1 \leq n \leq M} \|E_n\|_{\infty, \bar{\Omega}} \leq C\Delta t. \quad (3.6)$$

Proof: See [21] for details.

3.2. The Spatial discretization and the special meshes

3.2.1. Construction of piecewise-uniform (Shishkin mesh)

Assuming that N and $M = \mathcal{O}(N)$ are both positive integers, we consider the domain $\bar{D} = \bar{\Omega} \times [0, T] = [0, 1] \times [0, T]$. Additionally, let $N \geq 4$ be a positive even integer. We approximate solution of the problem (2.10)-(??) and (2.12) on a rectangular grid in the computation domain $\bar{D}^{N,M} = \{x_i\}_{i=0}^N \times \{x_j\}_{j=0}^M$ which concentrates mesh points in the interior and boundary layers with $\partial D^{N,M} = \bar{D}^{N,M} \setminus D$.

Since the SPPCDP with DIC (2.1) has a DIC has an interior layer at $x = \tilde{d}$, we construct a piecewise-uniform Shishkin mesh. The solution of the model problem (2.1) also exhibits boundary layers of width $\mathcal{O}(\sqrt{\varepsilon})$ and interior layer emanating at a point $x = \tilde{d}$, we construct the rectangular mesh as follows.

Based on the bounds (??) and (2.27) on the layer components, the Shishkin mesh is defined by using the following transition points.

We divide the transformed space domain $[0, 1]$ into the following four sub-intervals as follows

$$[0, 1] = [0, \tilde{d} - \tau_1] \cup [\tilde{d} - \tau_1, \tilde{d} + \tau_2] \cup [\tilde{d} + \tau_2, 1 - \hat{\tau}_x] \cup [1 - \hat{\tau}_x, 1],$$

where the transition points τ_1, τ_2 and $\hat{\tau}_x$ are defined by

$$\begin{cases} \hat{\tau}_x = \min \left\{ \frac{1}{4}, 2\sqrt{\varepsilon/\alpha} \ln N \right\}, \\ \tau_1 = \min \left\{ \frac{\tilde{d} - \hat{\tau}_x}{4}, 2\sqrt{T\varepsilon} \ln N \right\}, \\ \tau_2 = \min \left\{ 1 - \tilde{d}(T), \frac{\tilde{d} - \hat{\tau}_x}{4}, 2\sqrt{T\varepsilon/\delta} \ln N \right\}. \end{cases} \quad (3.7)$$

On each subinterval, a uniform mesh with $N/4$ mesh intervals is placed such that

$$\hat{\Omega}_x^N = \left\{ x_i : 0 \leq x \leq \tilde{d} - \tau_1 \right\} \cup \left\{ \tilde{d} + \tau_2 \leq x \leq 1 - \hat{\tau}_x \right\} \quad (3.8)$$

denotes the set of interior points of the mesh.

The mesh interval point N of spatial grids are distributed into four intervals in the ratio $\frac{3N}{8} : \frac{N}{4} : \frac{N}{4} : \frac{N}{8}$ and each of them is spaced uniformly.

Thus, the computational domain is defined as

$$\bar{D}^{N,M} = \hat{\Omega}_x^N \times \hat{\Omega}_t^M,$$

where

$$\hat{\Omega}_x^N = \{x_i : x_{i-1} + h_i, x_0 = 0, x_N = 1, 1 \leq i \leq N\}.$$

Then, obviously, $x_{N/2} = \tilde{d}$ and $\bar{\Omega}^N = \{x_i\}_{i=0}^N$. Let us denote the step sizes in space by $h_i = x_i - x_{i-1}, i = 1, \dots, N$ and let $\hat{h} = h_i + h_{i+1}$, for $i = 1, \dots, N - 1$.

Further, we denote the mesh size h_i in spatial direction as follows:

$$h_i = \begin{cases} H_{(l)} = \frac{4(\tilde{d} - \tau_1)}{N}, & \text{for } i = 1, \dots, N/4, \\ h_{(l)} = \frac{4\tau_1}{N}, & \text{for } i = N/4 + 1, \dots, N/2 - 1, \\ h_{(r)} = \frac{4\tau_2}{N}, & \text{for } i = N/2 + 1, \dots, 3N/4, \\ H_{(r)} = \frac{4(1 - \tilde{d} - \tau_2)}{N}, & \text{for } i = 3N/4 + 1, \dots, N. \end{cases} \quad (3.9)$$

3.3. Hybrid finite difference scheme

We propose a numerical scheme that combines the classical backward-Euler method for temporal discretization with the mid-point upwind scheme in the outer regions and the classical central

difference scheme in the interior layer regions and the boundary layer region for the spatial discretization.¹ We define the difference operators like forward D_x^+ , backward D_x^- , and central difference D_x^0 in space, second-order central difference operator δ_x^2 , and backward difference operator D_t^- in time, respectively for the mesh functions $v(x_i, t_j) = v_i^j$ on $\bar{D}^{N, \Delta t}$. We also define $v_{j\pm 1/2}^n = (v_j^n + v_{j\pm 1}^n)/2$, $a_{j\pm 1/2} = (a_j + a_{j\pm 1})/2$, $b_{j\pm 1/2}^n = (b_j^n + b_{j\pm 1}^n)/2$, $f_{j\pm 1/2}^n = (g_j^n + f_{j\pm 2}^n)/2$.

We note that, for a given function $v(x_i, t_j) = v_{ij}$ then we similarly define $v_{i\pm 1/2} = \frac{(v_{i\pm 1} + v_i)}{2}$.

Now, we are ready to define the hybrid numerical scheme for the SPPCDP (2.1) which consists of a proper combination of the midpoint upwind scheme in the outer regions $[0, \tilde{d} - \tau_1]$, $[\tilde{d} - \tau_1, \tilde{d} + \tau_2]$ and the central difference scheme which is used in the interior layer regions $[\tilde{d} + \tau_2, 1 - \hat{\tau}_x]$ and boundary layer region $[1 - \hat{\tau}_x, 1]$ to discretize the spatial derivatives.

The difference operator of DIC is denoted by

$$\mathcal{L}_{dis}^N U_i^{n+1} = D_x^F U_i^{n+1} - D_x^B U_i^{n+1}.$$

where, $D_{dis,x}^+$ denotes the forward, $D_{dis,x}^-$ backward DIC.

The finite difference operator is denoted by $\mathcal{L}_\varepsilon^N$, and a hybrid numerical scheme is developed by combining the three schemes, which takes the form:

$$\begin{cases} \mathcal{L}_{cen}^N U_i^{n+1} = f_i^{n+1}, & \text{for } i = 1, \dots, N/4, N/2 + 1, \dots, 3N/4, \\ \mathcal{L}_{mu}^N U_i^{n+1} = f_{i-\frac{1}{2}}^{n+1}, & \text{for } i = N/4 + 1, \dots, N/2, 3N/4 + 1, \dots, N - 1, \\ \mathcal{L}_{dis}^N U_i^{n+1} = D_x^F U_i^{n+1} - D_x^B U_i^{n+1} = 0, & \text{for } i = \frac{N}{2}. \end{cases} \quad (3.10)$$

and

$$\begin{cases} D_x^F U_i^{n+1} = [-U_{N/2+2}^{n+1} + 4U_{N/2+1}^{n+1} - 3U_{N/2}^{n+1}] / 2h_{(r)}, \\ D_x^B U_i^{n+1} = [U_{N/2-2}^{n+1} - 4U_{N/2-1}^{n+1} + 3U_{N/2}^{n+1}] / 2h_{(l)}. \end{cases} \quad (3.11)$$

¹Before describing the computational scheme, we define the following notations for various finite difference operators D_x^+ , D_x^- , D_x^0 , δ_x^2 and D_t^- :

$$\begin{aligned} aD_x v(x_i, t_j) &= \frac{1}{2}(a(x_i, t_j))D_x^- v(x_i, t_j) + \frac{1}{2}(a(x_i, t_j) - |a(x_i, t_j)|)D_x^+ v(x_i, t_j), \\ D_t^- v(x_i, t_j) &= \frac{v(x_i, t_j) - v(x_i, t_{j-1})}{\Delta t}, \\ D_x^- v(x_i, t_j) &= \frac{v(x_i, t_j) - v(x_{i-1}, t_j)}{h_i}, \\ D_x^+ v(x_i, t_j) &= \frac{v(x_{i+1}, t_j) - v(x_i, t_j)}{h_{i+1}}, \\ D_x^0 v(x_i, t_j) &= \frac{v(x_i, t_{j+1}) - v(x_{i-1}, t_j)}{h_i}, \\ \delta_x^2 v(x_i, t_j) &= \frac{2}{h_i + h_{i+1}} (D_x^+ v(x_i, t_j) - D_x^- v(x_i, t_j)) \end{aligned}$$

where

$$\begin{cases} \mathcal{L}_{cen}^N U_i^{n+1} = \varepsilon D_x^+ D_x^- U_i^{n+1} + a_i D_x^- U_i^{n+1} + b_i - D_t^- U_i^{n+1}, & i = 1, \dots, N/4, N/2 + 1, \dots, 3N/4, \\ \mathcal{L}_{dis}^N U_i^{n+1} = \varepsilon D_{dis,x}^+ D_{dis,x}^- U_i^{n+1} + a_i D_{dis,x}^0 U_i^{n+1} + b_i U_i^{n+1} - D_{dis,t}^- U_i^{n+1}, & i = \frac{N}{2}, \\ \mathcal{L}_{mu}^N U_i^{n+1} = \varepsilon D_x^+ D_x^- U_i^{n+1} + a_{i-\frac{1}{2}} D_x^- U_i^{n+1} + b_{i-\frac{1}{2}} - D_t^- U_{i+\frac{1}{2}}^{n+1}, & i = N/4 + 1, \dots, N/2, 3N/4 + 1, \dots, N - 1, \end{cases} \quad (3.12)$$

and

$$f_i = f(x_i) = \begin{cases} [m_i f_{i-1}^{n+1} + m_i^0 f_i^{n+1} + m_i^+ f_{i+1}^{n+1}], & \text{for } i = 1, \dots, N/2, \\ 0, & \text{for } i = N/2, \\ f_i, & i = N/2 + 1, \dots, N - 1, \end{cases} \quad (3.13)$$

After rearranging the terms in (3.10)-(3.12), we obtain the following complete hybrid scheme on the mesh $\bar{D}^{N,M}$:

$$\begin{cases} U_i^0 = \phi(x_i), & 0 \leq i \leq N, \quad [\phi](\tilde{d}) \neq 0, \quad 0 < \tilde{d} < 1, \\ \left\{ \begin{aligned} \mathcal{L}_{hyb}^N U_i^{n+1} &\equiv [r_i^- U_{i-1}^{n+1/2} + r_i^0 U_i^{n+1} + r_i^+ U_{i+1}^{n+1}] + [Q_i^- U_{i-1}^{n+1} + Q_i^0 U_i^{n+1} + Q_i^+ U_{i+1}^{n+1}] \\ &= \hat{f}_i^{n+1}, \quad \text{for } i = 1, \dots, N/2 + 1, \dots, N - 1, \\ 0, & \quad i = \frac{N}{2} \\ \mathcal{L}^* &= 0, \quad x_i = \tilde{d}, \quad t_j > 0, \\ U_0^{n+1} &= U_N^{n+1} = 0 \end{aligned} \right. , \\ \text{for } n = 0, 1, \dots, M - 1. \end{cases} \quad (3.14)$$

where

$$\mathcal{L}^* = \left[\frac{D_x^0 U_i}{\sqrt{g}} \right] (\tilde{d}, t_j),$$

$$\left[\frac{D_x^0 U_i}{\sqrt{g}} \right] (\tilde{d}, t_j) = \left[\frac{1}{\sqrt{g}} D_x U \right] (\tilde{d}, t_j) = \frac{1-d}{(1-\tilde{d}(t_j))} D_x^+ U(\tilde{d}, t_j) - \frac{d}{\tilde{d}(t_j)} D_x^- U(\tilde{d}, t_j).$$

and the right hand side (RHS) vector f_i^{n+1} is

$$\hat{f}_i^{n+1} = \begin{cases} [m_i f_{i-1}^{n+1} + m_i^0 f_i^{n+1} + m_i^+ f_{i+1}^{n+1}], & \text{for } i = 1, \dots, N/2 + 1, \dots, N - 1, \\ 0, & \text{for } i = N/2. \end{cases} \quad (3.15)$$

Here, the coefficients for $i = 1, \dots, N/4$ are given by

$$\left\{ \begin{array}{l} r_i^- = \left(\frac{-2\varepsilon}{\hat{h}h_i} - \frac{a}{hi} \frac{1}{2} + \frac{b}{2} \frac{1}{2} \right) - \frac{1}{2\Delta t}, \\ r_i^0 = \left(\frac{2\varepsilon}{h_i h_{i+1}} - \frac{a}{hi} \frac{1}{2} + \frac{b}{2} \frac{1}{2} \right) - \frac{1}{2\Delta t}, \\ r_i^+ = \Delta t \left(\frac{-2\varepsilon}{\hat{h}h_{i+1}} \right), \\ Q_i^- = \frac{1}{2\Delta t}, \quad Q_i^0 = \frac{1}{2\Delta t}, \quad Q_i^+ = 0, \\ m_i^- = \frac{1}{2}, \quad m_i^0 = \frac{1}{2}, \quad m_i^+ = 0, \end{array} \right. \quad (3.16)$$

and for $i = N/4 + 1, \dots, N/2 - 1, N/2 + 1, \dots, 3N/4 - 1$,

$$\left\{ \begin{array}{l} r_i^- = \left(\frac{-2\varepsilon}{\hat{h}h_i} - \frac{a_i}{\hat{h}_i} \right), \\ r_i^0 = \left(\frac{2\varepsilon}{h_i h_{i+1}} + b_i \right) - \frac{1}{\Delta t}, \\ r_i^+ = \left(\frac{-2\varepsilon}{\hat{h}h_{i+1}} + \frac{a_i}{\hat{h}_i} \right), \\ Q_i^- = 0, \quad Q_i^0 = \frac{1}{\Delta t}, \quad Q_i^+ = 0, \\ m_i^- = 0, \quad m_i^0 = 1, \quad m_i^+ = 0, \end{array} \right. \quad (3.17)$$

and for $i = 3N/4, \dots, N - 1$,

$$\left\{ \begin{array}{l} r_i^- = \left(\frac{-2\varepsilon}{\hat{h}_i h_i} - \frac{a_{dis}}{h_i} + \frac{b_{dis}}{2} \right), \\ r_i^0 = \left(\frac{2\varepsilon}{h_i h_{i+1}} - \frac{a_{dis}}{hi} + \frac{b_{dis}}{2} \right) - \frac{1}{\Delta t}, \\ r_i^+ = \left(\frac{-2\varepsilon}{\hat{h}h_{i+1}} \right), \\ Q_i^- = 0, \quad Q_i^0 = \frac{1}{2\Delta t}, \quad Q_i^+ = \frac{1}{2\Delta t}, \\ m_i^- = 0, \quad m_i^0 = \frac{1}{2}, \quad m_i^+ = \frac{1}{2}, \end{array} \right. \quad (3.18)$$

Finally, for $i = N/2$ the coefficients in (3.14) we have

$$\left\{ \begin{array}{l} c_{N/2}^{-,2} = -\frac{1}{2h_l}, \quad c_{N/2}^{-,1} = \frac{2}{h_l}, \\ c_{N/2}^0 = -\frac{3}{2} \left(\frac{1}{h_r} + \frac{1}{h_l} \right), \\ c_{N/2}^{+,1} = \frac{2}{h_l}, \quad c_{N/2}^{+,2} = -\frac{1}{2h_r}. \end{array} \right. \quad (3.19)$$

Finally, the numerical solution at the $(n+1)th$ level can be obtained by solving the tridiagonal equation. In general, we use the Shishkin mesh for the hybrid finite difference technique in the

preceding sections and we will choose the special meshes by comparing piecewise-uniform S-type mesh.

4. ε -Uniform convergence of the fully discrete scheme

We recall that, by combining the time semi-discretization scheme (3.1) obtained by applying the implicit Euler method and rearranging the terms in (3.14) obtained by applying a hybrid scheme for the spatial derivative, we have:

$$\left\{ \begin{array}{l} U_i^0 = \phi(x_i), \quad 0 \leq i \leq N, \quad [\phi](\tilde{d}) \neq 0, \quad 0 < \tilde{d} < 1, \\ \left\{ \begin{array}{l} \mathcal{L}_{hyb}^N U_i^{n+1} \equiv [r_i^- U_{i-1}^{n+1/2} + r_i^0 U_i^{n+1} + r_i^+ U_{i+1}^{n+1}] + [Q_i^- U_{i-1}^n + Q_i^0 U_i^n + Q_i^+ U_{i+1}^{n+1}] \\ = \hat{f}_i^{n+1}, \quad \text{for } i = 1, \dots, N/2 + 1, \dots, N - 1, \\ = 0, \quad i = \frac{N}{2} \\ \mathcal{L}^* = 0, \quad x_i = \tilde{d}, \quad t_j > 0, \\ U_0^{n+1} = U_N^{n+1} = 0 \end{array} \right. \\ \text{for } n = 0, 1, \dots, M - 1 \end{array} \right. \quad (4.1)$$

where

$$\mathcal{L}^* = \left[\frac{D_x^0 U_i}{\sqrt{g}} \right] (\tilde{d}, t_j),$$

$$\left[\frac{D_x^0 U_i}{\sqrt{g}} \right] (\tilde{d}, t_j) = \left[\frac{1}{\sqrt{g}} D_x U \right] (\tilde{d}, t_j) = \frac{1 - \tilde{d}}{(1 - \tilde{d}(t_j))} D_x^+ U(\tilde{d}, t_j) - \frac{d}{\tilde{d}(t_j)} D_x^- U(\tilde{d}, t_j).$$

and the coefficients are given by (3.16), (3.17), (3.18) and (3.19).

An existing solver can solve the above tridiagonal system of linear algebraic equations.

Lemma 4.1. *Truncation error (hybrid scheme) Let $t(x)$ be a smooth function defined on $\bar{\Omega}$ and also let $r_i = r(x_i)$ on $\bar{\Omega}^N$. For $i = 1, \dots, N - 1$, the following estimates holds true:*

Theorem 4.2. *(Truncation Error) Let $\tilde{d}(T) \leq 1 - \delta$ and $M = \mathcal{O}(N)$. If U is the solution of discrete problem (3.14) and u is the solution of singular problem (2.7), then we have,*

$$\|\hat{U} - u\|_{\bar{D}} \leq CN^{-1} \ln N + C|[\phi'](\tilde{d})|M^{-1/2}. \quad (4.2)$$

Proof The proof can be obtained in the same way as in Theorem 1 of [10, 12].

Theorem 4.3. *For sufficiently large N and $M \geq \mathcal{O}(\ln N)$, the solution Z of*

$$\begin{aligned} \mathcal{L}^{N,M} Z &= \mathcal{L}z, \quad x_i \neq \tilde{d} \quad t_j > 0; \\ Z &= 0, \quad (x_i, t_j) \in \partial D^{N,M}; \quad \left[\frac{D_x^0 Z}{\sqrt{g}} \right] (\tilde{d}, t) = 0. \end{aligned}$$

satisfies the following bounds

$$|Z(x_i, t_j)| \leq C \frac{\prod_{n=\frac{N}{2}}^i \left(1 + \frac{h_n}{\sqrt{2T_\varepsilon}}\right)}{\prod_{n=1} \left(1 + \frac{h_n}{\sqrt{2T_\varepsilon}}\right)} + CN^{-1} \ln N, \quad x_i \leq \tilde{d}.$$

$$|Z(x_i, t_j)| \leq C \prod_{n=\frac{N}{2}}^i \left(1 + \frac{h_n}{\sqrt{2T_\varepsilon}}\right)^{-1} + CN^{-1} \ln N, \quad x_i \geq \tilde{d}.$$

Proof It can be proved by following the steps in Theorem 3 of [13, 10].

Theorem 4.4. Suppose $\frac{2T}{\delta} \|a_x\| \leq 1 - \gamma$, $0 < \gamma < 1$, $a_x(\tilde{d}, 0) = 0$. For sufficiently large N and $M \geq O(\ln(N))$, the solution Z of

$$\mathcal{L}^{N,M} Z = \mathcal{L}z, \quad x_i \neq d \quad t_j > 0;$$

$$Z = 0, \quad (x_i, t_j) \in \partial D^{N,M}; \quad \left[\frac{D_x^0 Z}{\sqrt{g}} \right] (\tilde{d}, t) = 0,$$

satisfies the following bounds

$$|Z(x_i, t_j) - Z(x_i, t_j)| \leq C (N^{-1} (\ln N)^2 + CM^{-1}) \quad (4.3)$$

Proof. It can be proved by following the steps in Theorem 4 of [10, 11].

5. Error Analysis and Stability

5.1. Stability

Lemma 5.1. (Discrete minimum principle) For the purpose of error analysis, we make the assumption that $N \geq N_0$ and

$$\frac{N}{\ln N_0} \geq 2\tau_0 \alpha \|a\|_\infty, \quad (5.1)$$

$$\left(\|b\|_\infty + \frac{1}{\Delta t} \right) \leq \frac{\alpha^* N_0}{2}. \quad (5.2)$$

where $\alpha^* = \min \{\alpha_1^*, \alpha_2^*\}$, $\alpha = \max \{\alpha_1, \alpha_2\}$ and N_0 is an arbitrary positive integer. Then, discrete operator $\mathcal{L}_{hyb}^N$ defined in the hybrid numerical scheme in (3.14) satisfies the discrete minimum principle, in other words, if $\{Z_i\}$ are the mesh functions that satisfy $Z_0 \leq 0, Z_N \leq 0$ and $\mathcal{L}_{hyb}^N Z_i \geq 0$, in $\hat{\Omega}_N$, then $Z_i \leq 0$ on $\hat{\Omega}_N$.

Proof. The proof can be done by following the steps in Theorem 5.3.1 of [18]

Here, we remark that, if an M-matrix is associated with a hybrid finite difference scheme (3.14), then by assuming (5.1) and (5.2), we can conclude that the matrix is an M-matrix (monotone increasing). Hence, the operator in the hybrid scheme operator (3.14) satisfies the discrete minimum principle (see [21] for details).

5.2. Error Analysis

This section discusses the uniform error estimates for the numerical scheme in (3.14). We decompose the discrete solution (3.14) into smooth(regular), boundary and singular layer components analogous to the continuous problem (3.1) to estimate the nodal error $|\hat{U}_i^{n+1} - u(x_i, t_j)|$. We note that we study the error estimates separately for the outside and inside of the layer regions.

5.2.1. Decomposition of the discrete solutions in the transformed domain

We will estimate the nodal error $|U^{N,M}(x_i, t_n) - u(x_i, t_n)|$ by decomposing the solution $U^{N,M}(x_i, t_n)$ on the mesh $D^{N,M}$ in the following manner:

$$\underbrace{U^\pm}_{\text{Numerical solution}} = \underbrace{V^\pm}_{\text{Smooth solution}} + \underbrace{W^\pm}_{\text{Boundary component}}$$

where the smooth (regular) component $V^\pm$ and the singular component $W^\pm$ are defined separately. Define the mesh function P_L and P_R (which is approximate p respectively to the left and right of the discontinuity $x = \tilde{d}$) to the solutions of the following discrete problems

$$\begin{cases} \mathcal{L}_{hyb}^{N,M} P_L = f(x_i, t_j), & (x_i, t_j) \in D^N \cap \bar{D}^-, \\ P_L(0, t_j) = v(0, t_j), & P_L(\tilde{d}, t_j) = p(\tilde{d}^-, t_j), \quad t_j > 0, \\ P_L(x_i, 0) = p(x_i, 0), & x_i \leq \tilde{d}, \end{cases} \quad (5.3)$$

and

$$\begin{cases} \mathcal{L}_{hyb}^{N,M} P_R = f(x_i, t_j), & (x_i, t_j) \in D^N \cap \bar{D}^-, \\ P_R(1, t_j) = v(1, t_j), & P_R(\tilde{d}, t_j) = p(\tilde{d}^+, t_j), \quad t_j > 0, \\ P_R(x_i, 0) = p(x_i, 0), & x_i \geq \tilde{d}, \end{cases} \quad (5.4)$$

Define the mesh function $Q_L : \bar{D}^N \cap [0, \tilde{d}] \rightarrow R$ and $Q_R : \bar{D}^N \cap [\tilde{d}, 1] \rightarrow R$ (which is approximate q respectively to the left and right of the discontinuity $x = \tilde{d}$) to the solutions of the following discrete problems

$$\begin{cases} \mathcal{L}_{hyb}^{N,M} Q_L = 0, & (x_i, t_j) \in D^N \cap \bar{D}^-, \\ \mathcal{L}^N Q_R = 0, & (x_i, t_j) \in \bar{D}^N \cap \bar{D}^+, \\ Q_L(0, t_j) = 0, & Q_L(x_i, 0) = 0, \quad x_i \leq 0, \\ Q_R(x_i, 0) = 0, & x_i \geq \tilde{d}, \quad Q_R(1, t_j) = 0, \\ Q_R(\tilde{d}, t_j) + P_R(\tilde{d}, t_j) = Q_L(\tilde{d}, t_j) + P_L(\tilde{d}, t_j), \\ D_x^+ Q_R(\tilde{d}, t_j) + D_x^+ P_R(\tilde{d}, t_j) = D_x^- Q_L(\tilde{d}, t_j) + D_x^- P_L(\tilde{d}, t_j). \end{cases} \quad (5.5)$$

Finally, we can define the discrete solution U as

$$\begin{cases} P_L(x_i) + Q_L(x_i), & (x_i, t_j) \in D^N \cap \bar{D}^-, \\ P_L(\tilde{d}) + Q_L(\tilde{d}) = P_R(\tilde{d}) + Q_L(\tilde{d}), & x_i = \tilde{d}, \\ Q_R(x_i) + P_R(x_i), & (x_i, t_j) \in \bar{D}^N \cap \bar{D}^+, \end{cases} \quad (5.6)$$

In this section, we present some key lemmas to demonstrate the numerical solution's ε -uniform convergence in the discrete supremum norm. We study the error estimates in the outer layer region, inner layer region, and interior layer region separately in the following sections:

5.2.2. The error estimate in the outer region

The error bounds associated with the smooth components are obtained in the following lemma.

Lemma 5.2. (*Error in the smooth component*) Assume that $\varepsilon \leq CN^{-1}$. Then under the assumptions (5.1) and (5.2) of Lemma 5.1, the errors to the smooth layer components satisfy the following estimates

$$\begin{cases} |V_i^L - v(x_i, t_n)| \leq C(N^{-1} \ln N + CM^{-2} + \Delta t), & (x_i, t_n) \in \bar{D}^{N,M} \text{ for } 1 \leq i \leq N/4 \cup 3N/4 \leq i \leq N-1, \\ |V_i^R - v(x_i, t_n)| \leq C(N^{-2} \ln^2 N + \Delta t), & \text{for } N/4 \leq i \leq 3N/4. \end{cases} \quad (5.7)$$

Proof: The detailed proof is given by Mukherjee and Natesan in [21, 20].

5.2.3. The error estimate in the inner region

The error bounds associated with the singular (boundary) components are obtained in the following lemma.

Lemma 5.3. (*Error in the singular component*) We assume that $\gamma \geq \alpha/2$ and $\tau_0 \geq 2/\alpha$. Then under the assumptions (5.1) and (5.2) of Lemma 5.1, the errors associated with the singular components satisfy the following estimates

$$\begin{cases} |W_i^L - w(x_i, t_n)| \leq C(N^{-2} + \Delta t), & (x_i, t_n) \in \bar{D}^{N,M} \text{ for } N/4 \leq i \leq N/2 - 1, \\ |W_i^R - w(x_i, t_n)| \leq C(N^{-2} + \Delta t), & \text{for } 3N/4 \leq i \leq N-1. \end{cases} \quad (5.8)$$

where, $W_i^L = W_{1,i}^L + W_{2,i}^L$ and $W_i^R = W_{1,i}^R + W_{2,i}^R$.

Proof:

Furthermore, in the following lemma, we obtain the error bounds for the non-smooth components.

Lemma 5.4. Suppose $\gamma = \frac{\alpha}{2}$. Then, under the assumptions (5.1) and (5.2) of Lemma (3.9), the errors associated with the hybrid scheme (3.14)

$$|U_i - u(x_i, t_n)| \leq C(N^{-2} + \Delta t), \quad \text{for } 1 \leq i \leq N/4 \cup 3N/4 \leq i \leq N-1. \quad (5.9)$$

Proof: The detailed proof is given by Majumdar and Natesan in [18].

5.2.4. The error estimate in the interior layer region

On the domain $\bar{\Omega}^N = \{x_i\}^{0,N}$, we introduce the following two mesh functions

$$S_i = \prod_{k=1}^i \left(1 + \frac{\gamma h_k}{\varepsilon}\right), \quad \text{for } 1 \leq i \leq N/2$$

$$\Lambda_i = \prod_{j=1}^i \left(1 + \frac{\gamma h_k}{\varepsilon}\right), \quad \text{for } N/2 + 1 \leq i \leq N-1$$

(with the standard convention of $S_0 = 1$ and $\Lambda_N = 1$) where γ is a positive constant.

Lemma 5.5. In the domain $\bar{\Omega}^N = \{x_i\}^{0,N}$, the mesh functions S_i and Λ fulfill the following inequalities:

$$\begin{cases} \exp(-\gamma(\tilde{d} - x_i)/\varepsilon) \leq, \\ \exp(-\gamma(\tilde{d} - x_i)/\varepsilon) \end{cases} \quad (5.10)$$

Lemma 5.6. Let $\gamma = \alpha/2$. Then, for some constant C , the mesh functions S_i and Λ_i satisfy that

$$\begin{cases} -\mathcal{L}_{hyb}^N S_i \geq, \\ -\mathcal{L}_{hyb}^N \Lambda_i \geq \end{cases} \quad (5.11)$$

The error bounds associated with the interior components are obtained in the following lemma.

Lemma 5.7. (Error in the interior component)

$$|Z - z(x_i, t_n)| \leq \begin{cases} C(N^{-2} + \Delta t), & \text{for } 1 \leq i \leq N/4 \cup 3N/4 \leq i \leq N-1, \\ C(N^{-2} \ln^2 N + \Delta t), & \text{for } N/4 \leq i \leq 3N/4. \end{cases} \quad (5.12)$$

and

$$\begin{cases} |Z_L - z(x_i, t_n)| \leq CN^{-1} \ln N + CM^{-1} + \Delta t, & (x_i, t_n) \in \bar{D}^{N,M} \text{ for } N/2, \\ |Z_R - z(x_i, t_n)| \leq C(N^{-2} \ln^2 N + \Delta t), & \text{for } N/2. \end{cases} \quad (5.13)$$

Proof:

The above technical lemmas are used in the following lemma to obtain the bound for $|U_i - u(x_i, t_n)|$ in the interior layer regions.

Lemma 5.8. Suppose $\gamma = \frac{\alpha}{2}$. Then, under the assumptions (5.1) and (5.2) of Lemma (3.9), the errors associated with the hybrid scheme (3.14)

$$|U_i - u(x_i, t_n)| \leq C(N^{-2} \ln^2 N + \Delta t), \quad \text{for } N/4 + 1 \leq i \leq 3N/4 - 1. \quad (5.14)$$

Proof: The detailed proof is given by Majumdar and Natesan in [18, 21, 20].

Theorem 5.9. (The main convergence result) Suppose that $N \geq N_0$ satisfies the condition given in (5.1), (5.2) and $\varepsilon \leq CN^{-1}$. Then, if $\gamma \leq \alpha/2$ and $\tau_0 \geq 2/\gamma$, the respective solution u and U of (2.1) and hybrid numerical scheme (3.14) satisfy the following error bounds at time level t_n ;

$$|\hat{U} - u(x_i, t_n)| \leq \begin{cases} C(N^{-2} \ln^2 N + \Delta t), & \text{for } 1 \leq i \leq N/4 \cup 3N/4 \leq i \leq N-1, \\ C(N^{-2} + \Delta t), & \text{for } N/4 \leq i \leq 3N/4 \cup 3N/4 \leq i \leq N-1. \end{cases} \quad (5.15)$$

Proof We split the proof into three different cases depending on the mesh point $x_i \in \hat{\Omega}_x^N$:

Case 1 (Outer region)

For $1 \leq i \leq N/4$ and $N/2 \leq 3N/4 - 1$. In this case, we consider the mesh points $\{x_i\}$, for $N/4 \leq i \leq N/2 - 1$ and $3N/4 \leq i \leq N - 1$.

By using Lemma 5.2 and Lemma 5.3 in

$$|(\hat{U} - u)(x_i, t_n)| \leq \begin{cases} |(V_L - v_L)(x_i, t_n)| + |(W_L - w_L)(x_i, t_n)|, & \text{for } 1 \leq i \leq N/4 \cup 3N/4 \leq i \leq N-1, \\ |(V_R - v_R)(x_i, t_n)| + |(W_R - w_R)(x_i, t_n)|, & \text{for } N/4 \leq i \leq 3N/4. \end{cases} \quad (5.16)$$

we get the required error bounds in the outer region.

Case 2 (Inner region) Here, we consider the mesh points $\{x_i\}$, for $1 \leq i \leq N/4 - 1$ and $N/2 \leq i \leq 3N/4 - 1$. Now, for $1 \leq i \leq N/4 - 1$, by applying Taylor's series expansion with the

integral form of remainder term and the bounds of the derivatives given in Lemma 5.2 and Lemma 5.3, we get

$$\begin{aligned} |L_\varepsilon^{*N} \left(|\hat{U} - u(x_i)| \right)| &\leq Ch \int_{x_{i-1}}^{x_{i+1}} [\varepsilon |u^4(s)| + |u^3(s)| ds] \\ &\leq Ch^2 + ch (\varepsilon^{-2} + \varepsilon^{-1}) \leq \left(\exp(-\frac{\alpha x_{i-1}}{\varepsilon}) \exp(-\frac{\alpha x_i}{\varepsilon}) \right) \\ &\leq \left[h^2 + \frac{h^2}{\varepsilon^3} \exp(-\frac{\alpha x_i}{\varepsilon}) \right]. \end{aligned}$$

Similarly, for $N/2 + 1 \leq 3N/4 - 1$ we have

$$|L_\varepsilon^{*N} \left(|\hat{U} - u(x_i)| \right)| \leq \left[h^2 + \frac{h^2}{\varepsilon^3} \exp(-\frac{\alpha x_{i-\bar{d}}}{\varepsilon}) \right].$$

Case 3 (Interior layer region)

Here, we need to find the bound for the error estimate $|Z - z(x_i, t_n)|$ for $i = N/2$. In general, the estimate for $\hat{U} - u(x_i, t_n)$ follows from Lemma 5.2, Lemma 5.3 and Lemma 5.7 with applying the triangle inequality to the problem

$$(\hat{U} - u)(x_i, t_n) = (V - v)(x_i, t_n) + (W - w)(x_i, t_n) + (Z - z)(x_i, t_n)$$

6. Numerical Examples, Results and Discussion

In this section, we illustrate the numerical experiments for the theoretical findings presented in the previous sections.

The uniform two-mesh (double-mesh) global differences $E_\varepsilon^{N, \Delta t}$ and uniform orders of global convergence $P^{N, \Delta t}$ are calculated.

Then for each ε , we can calculate the maximum point-wise error by,

$$E_\varepsilon^{N, \Delta t} := \max_{(x_i, t_n) \in \bar{D}_\varepsilon^{N, M}} |U_\varepsilon^{N, \Delta t}(x_i, t_n) - U_\varepsilon^{2N, \frac{\Delta t}{2}}(x_i, t_n)|$$

and the corresponding order of convergence by,

$$P^{N, \Delta t} = \log_2 \left(\frac{E_\varepsilon^{N, \Delta t}}{E_\varepsilon^{2N, \frac{\Delta t}{2}}} \right).$$

Now, for each N and Δt , define $E^{N, \Delta t} = \max_\varepsilon E_\varepsilon^{N, \Delta t}$ as the ε -uniform maximum point-wise error and the corresponding local ε -uniform order of convergence is defined by

$$P^{N, \Delta t} = \log_2 \left(\frac{E^{N, \Delta t}}{E^{2N, \frac{\Delta t}{2}}} \right).$$

The maximum point-wise errors $E_\varepsilon^{N, \Delta t}$, the corresponding order of convergence $P_\varepsilon^{N, \Delta t}$ and the ε -uniform errors $E^{N, \Delta t}$, the corresponding ε -uniform order of convergence $P^{N, \Delta t}$, for Example 6.2 and Example ?? are presented in different tables for various values of ε and N . Consider the following singularly perturbed parabolic problem with discontinuous initial conditions:

Example 6.1. Consider the following singularly perturbed parabolic convection-diffusion problems with discontinuous initial conditions:

$$\begin{cases} u_t - \varepsilon u_{xx} + a(x, t)u_x = 4x(1 - x)t + t^2, & (x, t) \in (0, 1) \times (0, \frac{1}{2}], \\ u(x, 0) = -2; & 0 \leq x < 0.2, \quad u(x, 0) = 2; \quad 0.2 \leq x \leq 1, \\ u(0, t) = -2, & u(1, t) = 1, \quad 0 < t \leq 0.5. \end{cases} \quad (6.1)$$

where

$$a(x, t) = \frac{(0.9)^2 - (x - 0.2)^2}{4}$$

Note that $a_x(\tilde{d}, 0) = 0$.

$$\tilde{d}(t) = \frac{1.1 - 0.7 \exp(-9t/20)}{1 + \exp(-9t/20)}$$

Hence, we first examine if this transformation is needed if $a = a(x, t)$. In table 1, we see that, without the mapping, the method is not-parameter-uniform. Therefore, example 1 is now approximated with the numerical scheme (discrete problem) (??)-(??) proposed in this work. In addition, the computed approximations to $\tilde{y}$ and u are displayed in figures (1) and (2). Again, the maximum double-mesh global differences are given in table 1. These numerical results are in agreement with the theorem 4.3.

Example 6.2. Consider the following singularly perturbed parabolic problem with discontinuous initial conditions:

$$\begin{cases} u_t + \varepsilon u_{xx} + a(x)u_x(x, t) = f(x, t), & (x, t) \in (0, 1) \times (0, 1], \\ u(0, t) = t^2, & u(1, t) = 0, \quad 0 \leq t \leq 1, \end{cases} \quad (6.2)$$

The initial condition is

$$u(x, 0) = \begin{cases} 0.5x, & 0 \leq x \leq \tilde{d}, \\ x - 1, & \tilde{d} \leq x \leq 1 \end{cases} \quad (6.3)$$

where the source term

$$f(x, t) = \begin{cases} 3t^2(1 + x^2)/2, & 0 \leq x \leq 1/2 \text{ and } 0 \leq t \leq 1, \\ t^2(1 + x^2), & 1/2 < x \leq 1 \text{ and } 0 \leq t \leq 1. \end{cases} \quad (6.4)$$

and the convective term coefficients are

$$a(x) = \begin{cases} 1 + x(1 - x), & 0 \leq x \leq 0.5, \\ 2 + x(1 - x), & 0.5 < x \leq 1. \end{cases} \quad (6.5)$$

Solution: Hybrid finite Difference scheme We briefly state the output of our numerical results with this example of discontinuous initial data.

For this test example, plots of $u^{N,M}$ and $\tilde{y}^{N,M} = u^{N,M} + \tilde{S}$ are given for the sample of values, and the set of a parameter as

$$\varepsilon = \{10^0, 10^{-2}, 10^0, \dots, 10^{-26}\}$$

and $N = M = 64$.

The performed MATLAB computation is based on the following:

1. Numerical Scheme: Hybrid finite difference scheme in space and backward Euler scheme in time with a comparison of the classical upwind scheme in space and backward Euler scheme in time.

2. Mesh Structure: Shishkin mesh, Bakhvalov mesh. exponentially graded mesh.

For this test example, plots of $u^{N,M}$ and $\tilde{y}^{N,M} = u^{N,M} + \tilde{S}$ are given for the sample of values, and the set of a parameter as $\varepsilon = \{10^0, 10^{-2}, 10^0, \dots, 10^{-26}\}$ and $N = M = 64$.

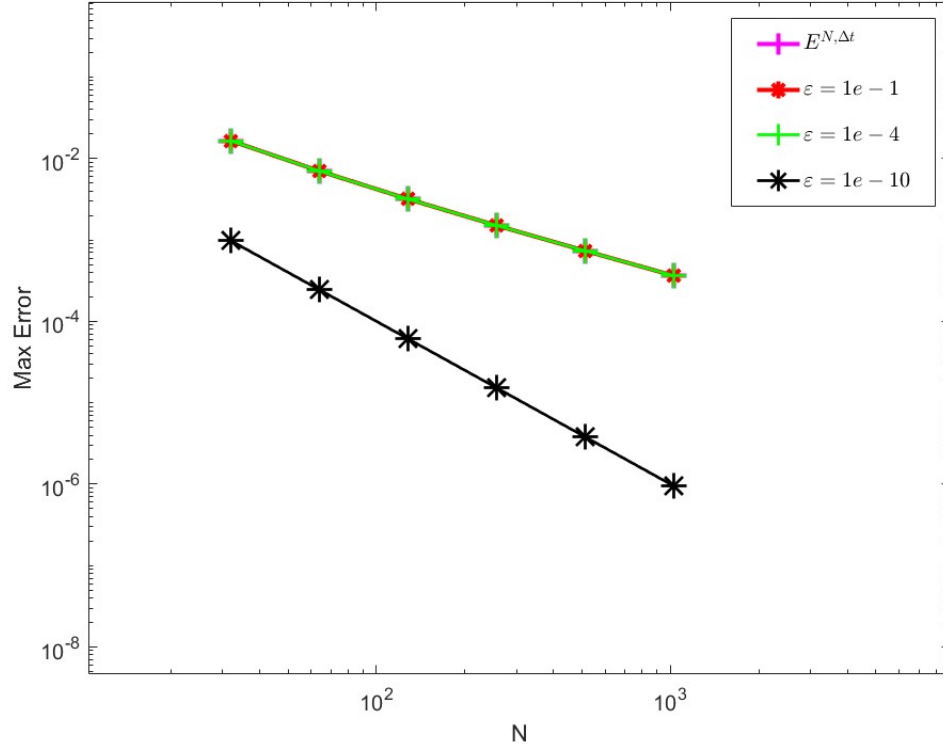


Figure 1: Loglog plot of the maximum point-wise error obtained by the numerical scheme (3.14) using Example 6.2

6.2

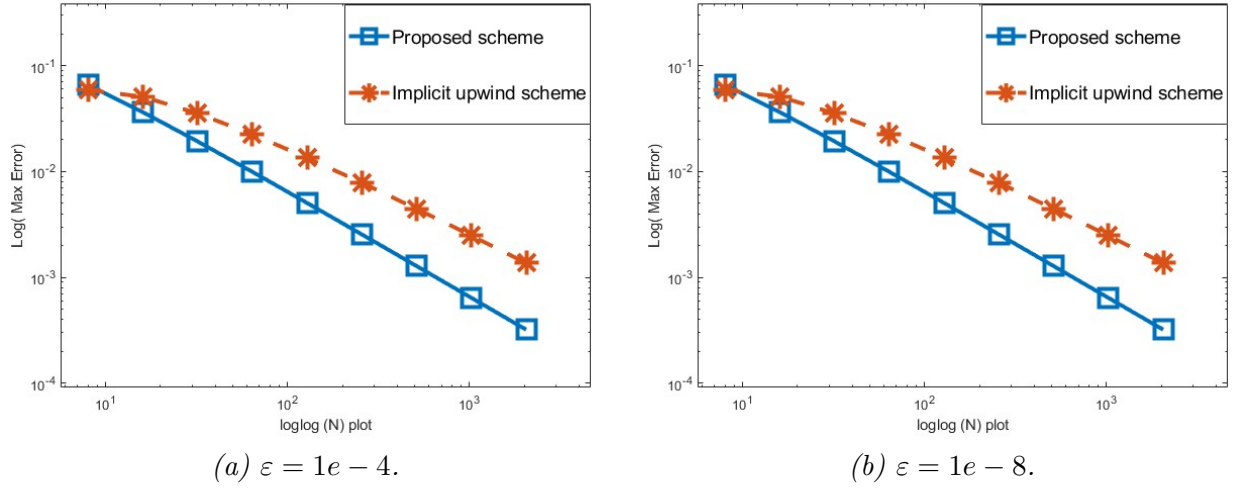


Figure 2: Loglog plot for comparison of the error to the solution (3.1.1) using numerical scheme (3.33) and (3.58)

Table 1. Number of mesh intervals found in the study

$\varepsilon \downarrow$	Number of Mesh Intervals ($N = M$)					
	32	64	128	256	512	1024
2^{-2}	1.230e-02 1.088	5.783e-03 1.048	2.798e-03 1.024	1.376e-03 1.012	6.821e-04 1.006	3.396e-04
2^{-3}	1.673e-02 0.633	1.079e-02 1.055	5.191e-03 1.027	2.547e-03 1.013	1.262e-03 1.007	6.280e-04
2^{-4}	2.008e-02 0.776	7.991e-03 0.781	4.652e-03 0.816	2.642e-03 0.832	1.484e-03 0.850	8.235e-04
2^{-6}	4.800e-03 0.831	2.698e-03 0.792	1.557e-03 0.813	8.862e-04 0.833	4.976e-04 0.848	2.763e-04
2^{-8}	2.468e-03 0.900	1.323e-03 0.866	7.255e-04 0.862	3.993e-04 0.857	2.204e-04 0.851	1.221e-04
2^{-10}	2.875e-03 0.776	1.679e-03 0.841	9.370e-04 0.854	5.184e-04 0.858	2.860e-04 0.864	1.572e-04
2^{-12}	2.968e-03 0.798	1.707e-03 0.839	9.543e-04 0.852	5.288e-04 0.853	2.927e-04 0.861	1.612e-04
2^{-14}	2.992e-03 0.804	1.714e-03 0.839	9.586e-04 0.851	5.313e-04 0.852	2.943e-04 0.859	1.623e-04
$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$
2^{-18}	1.368e-03 0.736	4.806e-03 0.760	2.838e-04 0.798	1.632e-04 0.815	9.278e-04 0.820	5.255e-04
$E^{N,M}$	2.008e-02	1.079e-02	5.191e-03	2.642e-03	1.484e-03	8.235e-04
$P^{N,M}$	0.896	1.055	0.974	0.832	0.849	

7. Conclusions

This paper studies a hybrid technique for solving 1D singularly perturbed parabolic convection-diffusion problems with discontinuous initial conditions by considering a proper combination of central differences and a midpoint upwind technique. The stability and convergence of the proposed approach have been investigated and ε -uniform error estimates have been obtained. The method is second-order convergent. Three examples are studied to verify the order of convergence and accuracy of the theoretical error estimates.

References

- [1] L. BOBISUD, *Parabolic equations with a small parameter and discontinuous data*, Journal of Mathematical Analysis and Applications, 26 (1969), pp. 208–220.
- [2] Z. CEN, *A hybrid difference scheme for a singularly perturbed convection-diffusion problem with discontinuous convection coefficient*, Applied mathematics and computation, 169 (2005), pp. 689–699.
- [3] C. CLAVERO, J. GRACIA, AND J. JORGE, *High-order numerical methods for one-dimensional parabolic singularly perturbed problems with regular layers*, Numerical Methods for Partial Differential Equations: An International Journal, 21 (2005), pp. 149–169.
- [4] C. CLAVERO, J. L. GRACIA, G. I. SHISHKIN, AND L. P. SHISHKINA, *An efficient numerical scheme for 1d parabolic singularly perturbed problems with an interior and boundary layers*, Journal of Computational and Applied Mathematics, 318 (2017), pp. 634–645.
- [5] C. CLAVERO, J. L. GRACIA, AND M. STYNES, *A simpler analysis of a hybrid numerical method for time-dependent convection–diffusion problems*, Journal of computational and applied mathematics, 235 (2011), pp. 5240–5248.
- [6] C. CLAVERO, J. JORGE, AND F. LISBONA, *A uniformly convergent scheme on a nonuniform mesh for convection–diffusion parabolic problems*, Journal of Computational and Applied Mathematics, 154 (2003), pp. 415–429.
- [7] R. DUNNE AND E. O’RIORDAN, *Interior layers arising in linear singularly perturbed differential equations with discontinuous coefficients*, dcu, maths. dept, Preprint series, (2007).
- [8] P. FARRELL, A. HEGARTY, J. MILLER, E. O’RIORDAN, AND G. SHISHKIN, *Singularly perturbed convection–diffusion problems with boundary and weak interior layers*, Journal of Computational and Applied Mathematics, 166 (2004), pp. 133–151.
- [9] P. FARRELL, A. HEGARTY, J. M. MILLER, E. O’RIORDAN, AND G. I. SHISHKIN, *Robust computational techniques for boundary layers*, CRC Press, 2000.
- [10] J. GRACIA AND E. O’RIORDAN, *Numerical approximation of solution derivatives of singularly perturbed parabolic problems of convection-diffusion type*, Mathematics of Computation, 85 (2016), pp. 581–599.
- [11] J. L. GRACIA AND E. O’RIORDAN, *Parameter-uniform numerical methods for singularly perturbed parabolic problems with incompatible boundary-initial data*, Applied Numerical Mathematics, 146 (2019), pp. 436–451.
- [12] ———, *Parameter-uniform approximations for a singularly perturbed convection-diffusion problem with a discontinuous initial condition*, Applied Numerical Mathematics, 162 (2021), pp. 106–123.
- [13] J. L. GRACIA AND E. O’RIORDAN, *Singularly perturbed reaction–diffusion problems with discontinuities in the initial and/or the boundary data*, Journal of Computational and Applied Mathematics, 370 (2020), p. 112638.

- [14] J. L. GRACIA AND E. O’RIORDAN, *Numerical approximations to a singularly perturbed convection-diffusion problem with a discontinuous initial condition*, Numerical Algorithms, 88 (2021), pp. 1851–1873.
- [15] P. HEMKER AND G. SHISHKIN, *Approximation of parabolic pdes with a discontinuous initial condition*, East-West Journal of Numerical mathematics, 1 (1993), pp. 287–302.
- [16] ———, *Discrete approximation of singularly perturbed parabolic pdes with a discontinuous initial condition*, in Bail VI Proceedings, 1994, pp. 3–4.
- [17] M. K. KADALBAJOO AND A. AWASTHI, *The midpoint upwind finite difference scheme for time-dependent singularly perturbed convection-diffusion equations on non-uniform mesh*, International Journal for Computational Methods in Engineering Science and Mechanics, 12 (2011), pp. 150–159.
- [18] A. MAJUMDAR AND S. NATESAN, *A higher-order hybrid numerical scheme for singularly perturbed convection-diffusion problem with boundary and weak interior layers*, International Journal of Mathematical Modelling and Numerical Optimisation, 10 (2020), pp. 68–101.
- [19] J. MILLER, E. O’RIORDAN, G. SHISHKIN, AND R. B. KELLOGG, *Fitted numerical methods for singular perturbation problems*, SIAM Review, 39 (1997), pp. 535–537.
- [20] K. MUKHERJEE, *Parameter-uniform improved hybrid numerical scheme for singularly perturbed problems with interior layers*, Mathematical Modelling and Analysis, 23 (2018), pp. 167–189.
- [21] K. MUKHERJEE AND S. NATESAN, *Parameter-uniform hybrid numerical scheme for time-dependent convection-dominated initial-boundary-value problems*, Computing, 84 (2009), pp. 209–230.
- [22] ———, *ε -uniform error estimate of hybrid numerical scheme for singularly perturbed parabolic problems with interior layers*, Numerical Algorithms, 58 (2011), pp. 103–141.
- [23] E. O’RIORDAN AND J. QUINN, *A linearised singularly perturbed convection–diffusion problem with an interior layer*, Applied Numerical Mathematics, 98 (2015), pp. 1–17.
- [24] E. O’RIORDAN AND G. SHISHKIN, *Singularly perturbed parabolic problems with non-smooth data*, Journal of computational and applied mathematics, 166 (2004), pp. 233–245.
- [25] T. PRABHA, M. CHANDRU, AND V. SHANTHI, *Hybrid difference scheme for singularly perturbed reaction-convection-diffusion problem with boundary and interior layers*, Applied Mathematics and Computation, 314 (2017), pp. 237–256.
- [26] H.-G. ROOS, M. STYNES, AND L. TOBISKA, *Robust numerical methods for singularly perturbed differential equations: convection-diffusion-reaction and flow problems*, vol. 24, Springer Science & Business Media, 2008.
- [27] S. K. SAHOO AND V. GUPTA, *Higher order robust numerical computation for singularly perturbed problem involving discontinuous convective and source term*, Mathematical Methods in the Applied Sciences, 45 (2022), pp. 4876–4898.

- [28] G. I. SHISHKIN, *Grid approximation of singularly perturbed parabolic convection-diffusion equations with a piecewise-smooth initial condition*, Zhurnal Vychislitel'noi Matematiki i Matematicheskoi Fiziki, 46 (2006), pp. 52–76.
- [29] D. SODANO, *Richardson extrapolation technique for singularly perturbed parabolic convection-diffusion problems with a discontinuous initial condition*, Asian Journal of Pure and Applied Mathematics, 6(1), 1–25, (2024).
- [30] ———, *An upwind finite difference method to singularly perturbed parabolic convection-diffusion problems with discontinuous initial conditions on a piecewise-uniform mesh*, Mendeley Data, V2 (2024).
- [31] F. WONDIMU GELU AND G. F. DURESSA, *A novel numerical approach for singularly perturbed parabolic convection-diffusion problems on layer-adapted meshes*, Research in Mathematics, 9 (2022), p. 2020400.
- [32] N. S. YADAV AND K. MUKHERJEE, *Uniformly convergent new hybrid numerical method for singularly perturbed parabolic problems with interior layers*, International Journal of Applied and Computational Mathematics, 6 (2020), p. 53.